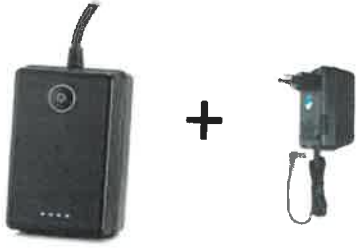


A1. Model No.: SV-AC552		A2. Product Name: Automotive Mobile Power Battery																			
B1. Product Features:		 <p>Power Adapter Optional for Charging</p>																			
<ol style="list-style-type: none"> 1. Fast charge 2. Wide input voltage DC 5~24V 3. Switch on/off button 4. Low standby power consumption 5. Charging capacity indicator light 6. Discharging capacity indicator light 7. Overcharge protection 8. Overdischarge protection 9. Overload/short circuit protection 10. Over temperature protection 11. Load detection 12. Magnetic base mount 13. UPS (Uninterrupted Power Supply) 																					
B2. Key Specifications:		<p style="text-align: center;">TIPS</p> <ol style="list-style-type: none"> 1. To protect the battery from damage, please charge it to 75% of capacity before storing it for a long period of time, and charge it again to 75% within 150 days. 2. After being stored for long time, the initial charging current might be relatively low, but will get back to normal after a while. 3. AC Adapter (charger) is recommended for charging. 																			
<table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">1. Battery Capacity:</td> <td>10050mAh/3.6V</td> </tr> <tr> <td>2. Charging Voltage:</td> <td>DC 5~24V</td> </tr> <tr> <td>3. Charging Time:</td> <td>3.3H(DC 12/24V at 25°C) 7H(DC 5V at 25°C)</td> </tr> <tr> <td>4. Discharging Voltage:</td> <td>9.5~12.6V(10.8V)</td> </tr> <tr> <td>5. Discharging Time</td> <td>17.5H (160mA~180mA/12V)</td> </tr> <tr> <td>6. Charging Temperature:</td> <td>-10 ~ 45°C</td> </tr> <tr> <td>7. Discharging Temperature:</td> <td>-20 ~ 60°C</td> </tr> <tr> <td>8. Storage Temperature:</td> <td>-20 ~ 60°C</td> </tr> <tr> <td>9. Waterproof Rating:</td> <td>IP69K</td> </tr> <tr> <td>10. Dimension:</td> <td>100.5*64.5*40.7 (mm)</td> </tr> </table>				1. Battery Capacity:	10050mAh/3.6V	2. Charging Voltage:	DC 5~24V	3. Charging Time:	3.3H(DC 12/24V at 25°C) 7H(DC 5V at 25°C)	4. Discharging Voltage:	9.5~12.6V(10.8V)	5. Discharging Time	17.5H (160mA~180mA/12V)	6. Charging Temperature:	-10 ~ 45°C	7. Discharging Temperature:	-20 ~ 60°C	8. Storage Temperature:	-20 ~ 60°C	9. Waterproof Rating:	IP69K
1. Battery Capacity:	10050mAh/3.6V																				
2. Charging Voltage:	DC 5~24V																				
3. Charging Time:	3.3H(DC 12/24V at 25°C) 7H(DC 5V at 25°C)																				
4. Discharging Voltage:	9.5~12.6V(10.8V)																				
5. Discharging Time	17.5H (160mA~180mA/12V)																				
6. Charging Temperature:	-10 ~ 45°C																				
7. Discharging Temperature:	-20 ~ 60°C																				
8. Storage Temperature:	-20 ~ 60°C																				
9. Waterproof Rating:	IP69K																				
10. Dimension:	100.5*64.5*40.7 (mm)																				
C1. Accessories:																					
1- Manual		1-DC male-USB male																			
D1. Packing:																					
Weight Of Unit Product:		400g																			
Dimension Of Giftbox:		12.2*8.6*9.2cm																			
20"/40"/40"HQ Qty:		Qty Per Carton:																			
E1. Payment Terms:		F1. Warranty Term:																			
T/T		18 months of warranty																			
G1. Certificates:		H1. Rerence Price & Lead time:																			
		Sample:	Lead time: 10-14 Days																		
		Adapter																			
		Optional:																			
I1. Remarks:																					