


RoHS 適合品  
(RoHS Compliant)  
Cd ≤ 75 ppm  
Pb ≤ 4 wt%


Electrical:  
Impedance Non-constant  
Frequency Range DC-300 MHz  
Voltage Rating 500 volts rms(min)

Mechanical:  
Mating 5/8-24 threaded coupling  
Cable Affixment Braid and Center Contact Crimp

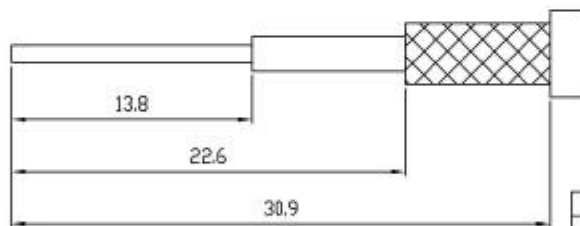

Recommend Cable Stripping

HT-5333A

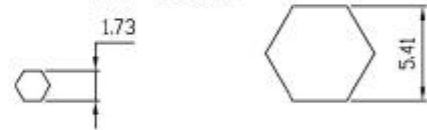

Die Size A Die Size B

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH	ITEM #	CODE
5	FERRULE	BRASS	1	NICKEL	6.5x5.33x12.7	C2700
4	BODY	BRASS	1	NICKEL	205A-1	C360
3	INSULATOR	TEFLON	1		205D-3	ASTM I
2	CENTER PIN	BRASS	1	SILVER	205A-2C	C360
1	SHELL	BRASS	1	NICKEL	205D-8	C360

尺寸 (mm)	公差	製圖 DRAW	名 稱 TITLE	組 合 圖	品 名 TITLE	205A-TBSN/1/1	版 次 VERSION	參 考 版
0-5mm	±0.05	設 計 DESIGNED	備 註 REMARK	UHF Plug Crimp for RG58	電腦檔名 COMPUTER NAME		編 號 SERIES #	
5-10mm	±0.1	檢 圖 CHECKED						
10-15mm	±0.2	核 定 APPROVED						
15-20mm	±0.3	單 位 UNIT						
20mm 以上	±0.4	M/M	比 例 SCALE	3:1	日 期 DATE	06/21/2010		